
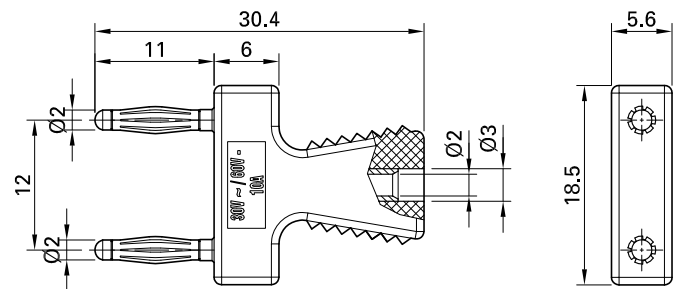


KS2-12L/A


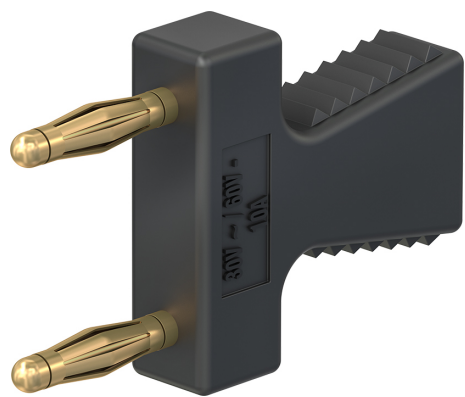


Item number 63.9354-\*

Insulated, Ø 2 mm, with rigid Ø 2 mm socket in handling part.

| Technical data                       |                         |
|--------------------------------------|-------------------------|
| Diameter of plug system              | 2 mm                    |
| Rated Values                         | 30 V, 10 A / 60 V, 10 A |
| Surface treatment electrical contact | Au                      |
| Base material electrical contact     | CuZn                    |
| Standard color(s) *                  | 21 22 23 24 25          |
| Optional color(s)                    | 28 29                   |
| Plug spacing                         | 12 mm                   |
| Suitable for                         | BL2-12/20/A             |
| Test accessory acc. to               | IEC EN 61010-031        |

KS2-12L/N

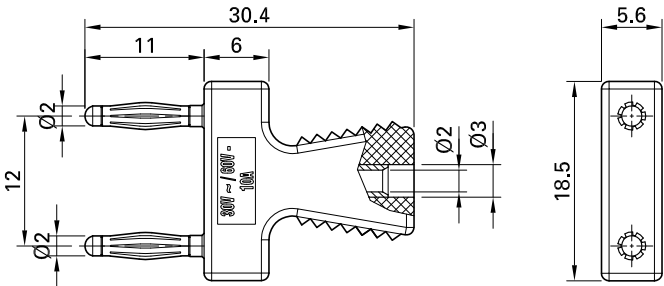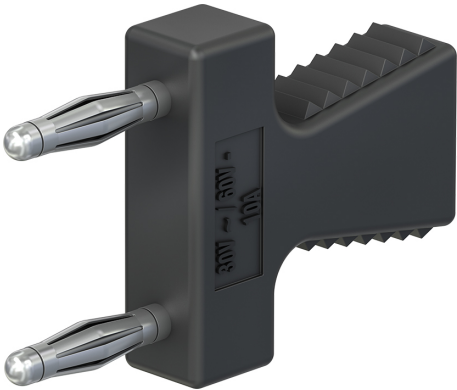

Item number 63.9355-\*

Insulated, Ø 2 mm, with rigid Ø 2 mm socket in handling part.

| Technical data                       |                         |
|--------------------------------------|-------------------------|
| Diameter of plug system              | 2 mm                    |
| Rated Values                         | 30 V, 10 A / 60 V, 10 A |
| Surface treatment electrical contact | Ni                      |
| Base material electrical contact     | CuZn                    |
| Standard color(s) *                  | 21 22 23 24 25          |
| Optional color(s)                    | 28 29                   |
| Plug spacing                         | 12 mm                   |
| Suitable for                         | BL2-12/20/A             |
| Test accessory acc. to               | IEC EN 61010-031        |