
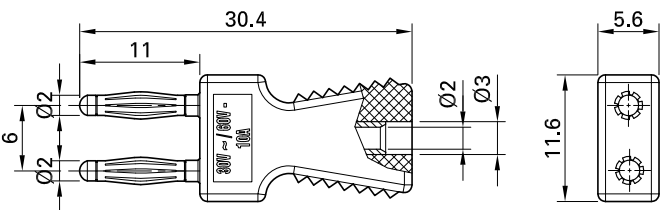


KS2-6L/A


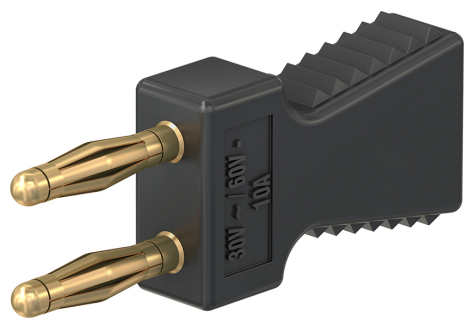


Item number 63.9352-*

Insulated, Ø 2 mm, with rigid Ø 2 mm socket in handling part.

Technical data	
Diameter of plug system	2 mm
Rated Values	30 V, 10 A / 60 V, 10 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Standard color(s) *	21 22 23 24 25
Optional color(s)	28 29
Plug spacing	6 mm
Suitable for	BL2-6/20/A
Test accessory acc. to	IEC EN 61010-031

KS2-6L/N

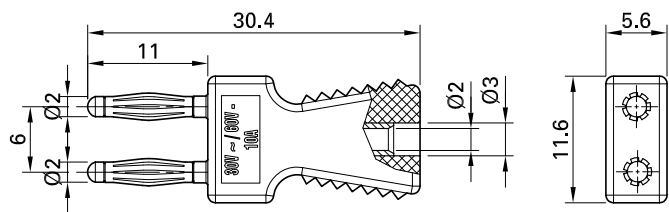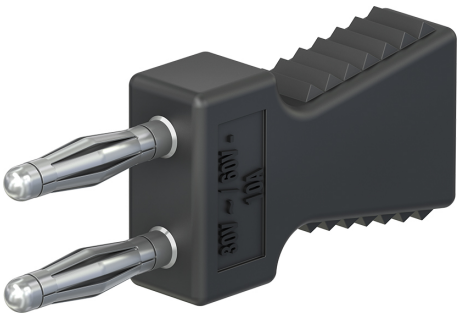

Artikelnummer 63.9353-*

Isoliert, Ø 2 mm, mit starrer Ø 2 mm-Buchse im Isoliergriff.

Technische Daten	
Durchmesser Stecksystem	2 mm
Bemessungsdaten	30 V, 10 A / 60 V, 10 A
Oberfläche Kontaktteil	Ni
Grundmaterial Kontaktteil	CuZn
Standardfarbe(n) *	21 22
Optionale Farbe(n)	23 24 25 28 29
Steckweite	6 mm
Passend für	BL2-6/20/A
Messzubehör nach	IEC EN 61010-031