


SKPS-4

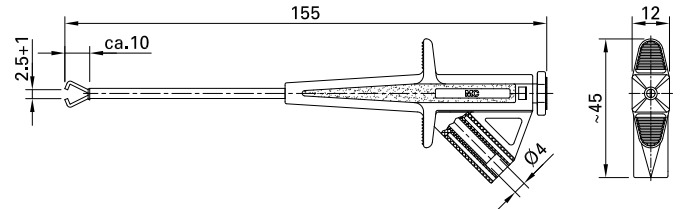


Item number 24.0224-*

With flexible shaft and spring wire grabber (stainless steel) for a good contact to pins and wires in inaccessible places. Especially suitable for measuring voltages. The shaft is silicone insulated and guarantees good heat resistance and flexibility even at low temperatures.

Ø 4 mm rigid socket in handle accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

| Technical data | |
|----------------------------------|---------------------|
| Diameter of plug system | 4 mm |
| Rated Values | 1000 V, CAT II, 4 A |
| Base material electrical contact | Edelstahl |
| Standard color(s) * | 21 22 23 24 25 |
| Optional color(s) | 26 |
| Opening width | 2.5 mm |
| Test accessory acc. to | IEC EN 61010-031 |
| Approvals | UL, CE |

SKPS-4_100

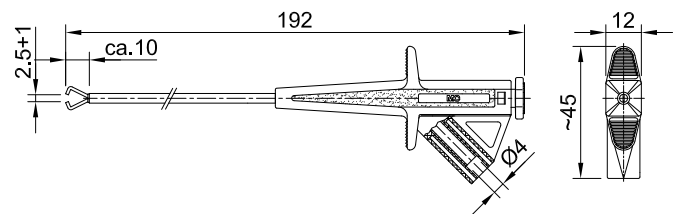

Item number 24.0227-*

With flexible shaft and spring wire grabber (stainless steel) for a good contact to pins and wires in inaccessible places. Especially suitable for measuring voltages. The shaft is silicone insulated and guarantees good heat resistance and flexibility even at low temperatures. \varnothing 4 mm rigid s

socket in handle accepting spring-loaded \varnothing 4 mm plugs with rigid insulating sleeve.

| Technical data | |
|----------------------------------|---------------------|
| Diameter of plug system | 4 mm |
| Rated Values | 1000 V, CAT II, 4 A |
| Base material electrical contact | Edelstahl |
| Standard color(s) * | 21 22 23 24 25 |
| Optional color(s) | 26 |
| Opening width | 2.5 mm |
| Test accessory acc. to | IEC EN 61010-031 |
| Approvals | UL, CE |